

OS-1 or OS-2 protection tube is used with temperature sensor as a replaceable component of the part that deteriorates the most often. It is made of acid-resistant steel. Selection of parameters and design depends on sensor requirements. It is manufactured in accordance with individual client requirements.

Specification

Material*


Stainless steel 1.4541 acc. to PN-EN 10088
Max. operating temperature in air 800°C

Dimensions*

D	4	5	6	8	9	10	11	12	15
g	0,4	0,5	0,5	0,6	1	1,5	2	1,5	2
L[mm]	50÷2000								

Protection tube length L [mm] = 5÷2000

*other parameters acc. to requirements

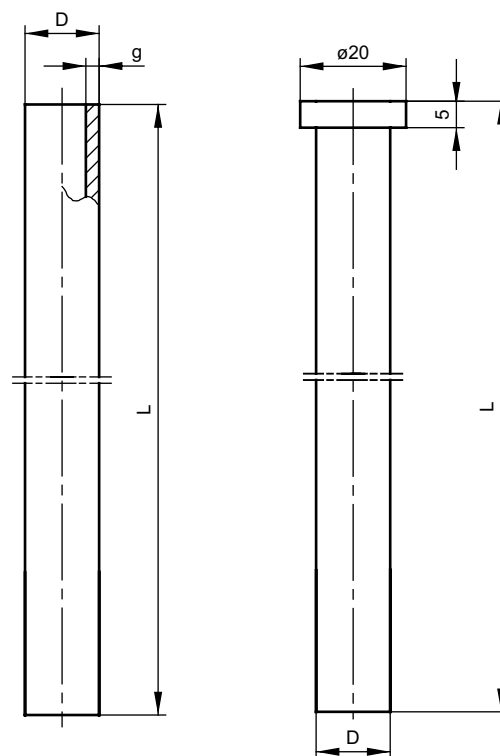

Product code

1	<input type="text"/>	Protection tube type	
		1	straight
2	<input type="text"/>	2	with falnge
		Tube dimension D	
3	<input type="text"/>	6	6mm
		other parameters acc. to requirements	
3	<input type="text"/>	Protection tube length L	
		100	100mm
		other parameters acc. to requirements	

1 2 3

OS - - -

Ordering example:

Protection Tube OC-10-799-1030