

High pressure comparison test pump LR-Cal LSP-7000, up to 7,000 bar (101,520 psi)

Pressure Source for calibration purposes

Operating fluid: oil

Pressure Comparison Test Pumps are used to generate pressures for checking, adjusting and calibrating mechanical and electronic pressure measuring instruments by comparative measurements. These pressure tests may be carried out in laboratories, workshops or on site at the measuring point.



The comparison test pump LR-Cal LSP-7000 is equipped with two connections for the test specimen and the reference instrument which can be used in any order. If the instrument to be tested and a sufficiently accurate reference measuring instrument are connected to the test pump, the same pressure is applied to the two measuring instruments when the pump is operated. By comparing the two measured values at random pressure values, the accuracy can be verified or the instrument under test can be adjusted. First the pressure is set via an integrated initial (priming) pressure pump. For further pressure generation and for fine adjustment by approaching the measuring point, precisely an adjustable volume with precision spindle is available. Another important feature of the test pump LR-Cal LSP-7000 is the rotating spindle that only runs inside the body of the pump. This eliminates the negative effect of a bending torque on a spindle turning outside the body and offers the advantage, especially for use in the field, that the dimensions of these pumps do not change during operation due to the spindle turning.

Technical Data:

Order-Code:	LSP-7000-HP	
Pressure range:	0...7,000 bar / 0...101,520 psi	
Medium:	Oil	
Pressure ports:	2 x M16x1,5 male thread, rotating, changeable, with sealing cone	
Distance of the test con.:	346 mm	
Liquid reservoir:	250 cm ³	
Piston diameter:	7.5 mm	
Swept volume per revolution:	approx. 0.08 cm ³	
Overall swept volume:	approx. 2.5 cm ³	
Required moment	250 bar	1.5 Nm
at...	500 bar	3.0 Nm
	1,000 bar	6.0 Nm
	3,000 bar	18 Nm
	5,000 bar	30 Nm
	7,000 bar	42 Nm
Materials:	Cylinder	Stainless steel
	Piston	Hardened steel
	Tubing	Stainless steel 1.4404, 6 x 2 mm
	Sealing gaskets	NBR
Dimensions:	W 460 x D 445 x H 265 mm	
Weight:	approx. 32.5 kg	
CE-Conformity:	97/23/EC Pressure equipment directive (module A)	


LSP-7000

Hydraulic pressure comparison test pump
Pressure up to 7,000 bar

LR-Cal



Dimensions:

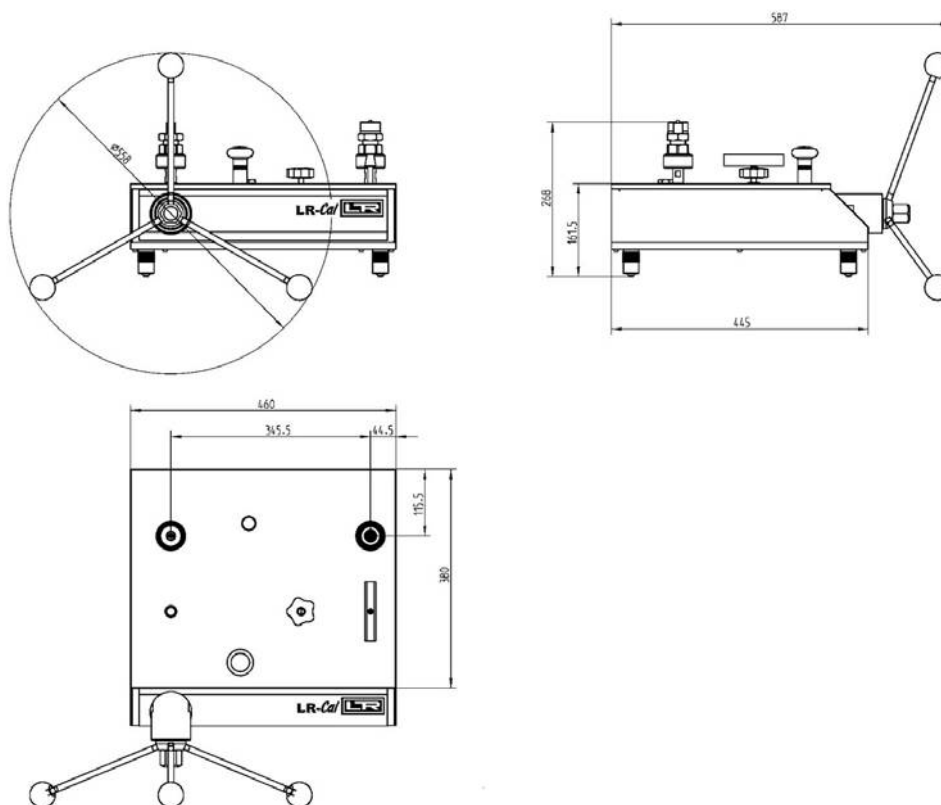

Optional Accessories:

Order-Code	Description
LSP-HP-FLUID	Operation liquid, 0.5 l in plastic bottle
LSP-HP-A-M16	Threaded adapter M16 x 1.5 male thread with sealing cone Material: hardened stainless steel
LSP-HP-A-M20	Threaded adapter M20 x 1.5 male thread with sealing cone Material: hardened stainless steel
LSP-HP-A-916	Threaded adapter 9/16-18 UNF male thread with sealing cone Material: hardened stainless steel
LSP-HP-A-G12	Threaded adapter 1/2" BSP female thread with O-ring, max. 1,600 bar (max. 23,200 psi). Material: stainless steel 1.4571